


$V_{DS} = 1200\text{ V}$
 $I_D (T_C=25^\circ\text{C}) = 69\text{ A}$
 $R_{DS(on).typ} = 32\text{ m}\Omega @ V_{GS} = 20\text{ V}$



TO-247-4



Features

- Wide bandgap SiC MOSFET technology
- Low On-Resistance with High Blocking Voltage
- Low Capacitances with High-Speed switching
- Low reverse recovery(Qrr)
- Halogen free, RoHs compliant

Benefits

- Reduce switching losses
- Increased system Switching Frequency
- Increased power density
- Reduction of heat sink requirements

Applications

- Switch mode power supplies
- Renewable energy
- Motor drives
- High voltage DC/DC converters

Package Pin Definitions

- Pin1- Drain
- Pin2- Power Source
- Pin3- Kelvin Source
- Pin4- Gate

Package Parameters

Part Number	Marking	Package
ES32N120T4AA	ES32N120T4AA	TO-247-4

Maximum Ratings ($T_C=25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter	Test conditions	Value	Unit	Note
V_{DSmax}	Drain-Source Voltage	$V_{GS} = 0V, I_D = 100\mu A$	1200	V	
V_{GSmax}	Gate-Source voltage	AC ($f > 1\text{ Hz}$)	-10/+25	V	
V_{GSop}	Recommend Gate-Source Voltage	Static	-4/+20	V	
I_D	Continuous Drain current	$V_{GS} = 20V, T_C = 25^{\circ}\text{C}$	69	A	Fig. 14
		$V_{GS} = 20V, T_C = 100^{\circ}\text{C}$	49		
$I_{D,pulse}$	Pulsed Drain Current	Pulse with t_p limited by T_{jmax}	140	A	Fig. 18
P_D	Power Dissipation	$T_C = 25^{\circ}\text{C}, T_j = 175^{\circ}\text{C}$	348	W	Fig. 16
T_j	Operating junction temperature		-55~175	$^{\circ}\text{C}$	
T_{stg}	Storage temperature		-55~175	$^{\circ}\text{C}$	
	TO-247 mounting torque	M3 Screw	0.7	Nm	

Thermal Characteristics

Symbol	Parameter	Value			Unit	Note
		Min.	Typ.	Max.		
$R_{th(jc)}$	Thermal resistance from Junction to Case		0.43		K/W	Fig. 15
$R_{th(ja)}$	Thermal resistance from Junction to Ambient		40		K/W	

Electrical Characteristics $T_j=25^\circ\text{C}$ unless otherwise specified
Static Characteristics

Symbol	Parameter	Test conditions	Value			Unit	Note
			Min.	Typ.	Max.		
$V_{(BR)DSS}$	Drain-Source Breakdown voltage	$V_{GS} = 0V, I_D = 100\mu A$	1200			V	
$V_{GS(th)}$	Gate Threshold voltage	$V_{GS} = V_{DS}, I_D = 11.5mA$		2.5		V	Fig. 9
		$V_{GS} = V_{DS}, I_D = 11.5mA, T_j = 175^\circ\text{C}$		2.0			
I_{GSS}	Gate-Source Leakage current	$V_{GS} = 20V, V_{DS} = 0V$			250	nA	
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 1200V, V_{GS} = 0V, T_j = 25^\circ\text{C}$		1	50	μA	
$R_{DS(on)}$	Drain-Source On-state Resistance	$V_{GS} = 20V, I_D = 40A$		32	48	m Ω	Fig. 3, 4, 5
		$V_{GS} = 18V, I_D = 40A$		35			
		$V_{GS} = 20V, I_D = 40A, T_j = 175^\circ\text{C}$ $V_{GS} = 20V, I_D = 40A, T_j = 175^\circ\text{C}$		70 75			
g_{fs}	Transconductance	$V_{GS} = 18V, I_D = 40A$		26		S	Fig. 6
		$V_{GS} = 18V, I_D = 40A, T_j = 175^\circ\text{C}$		22			

Gate Charge Characteristics

Symbol	Parameter	Test conditions	Value			Unit	Note
			Min.	Typ.	Max.		
Q_{GS}	Gate to Source Charge	$V_{DS} = 800V$ $I_D = 20A$ $V_{GS} = -4V/20V$		20.9		nC	Fig. 10
Q_{GD}	Gate to Drain Charge			23.2			
Q_G	Total Gate Charge			121			

AC Characteristics ($T_j=25^{\circ}C$ unless otherwise specified)

Symbol	Parameter	Test conditions	Value			Unit	Note
			Min.	Typ.	Max.		
C_{iss}	Input Capacitance	$V_{GS} = 0V, V_{DS} = 1000V$ $f = 1\text{ MHz}$ $V_{AC} = 25mV$		2812		pF	Fig. 13
C_{oss}	Output Capacitance			111		pF	
C_{rss}	Reverse Transfer Capacitance			7		pF	
$R_{G(int)}$	Internal Gate Resistance	$f=1\text{ MHz}, V_{AC} = 25mV$		1		Ω	

Reverse Diode Characteristics ($T_J=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Test conditions	Value			Unit	Note
			Min.	Typ.	Max.		
V_{SD}	Diode Forward Voltage	$V_{GS} = -4\text{V}, I_{SD} = 20\text{A}$		3.9		V	Fig. 7,8
		$V_{GS} = -4\text{V}, I_{SD} = 20\text{A}, T_J = 175^\circ\text{C}$		3.3			
I_S	Continuous Diode Forward Current	$V_{GS} = -4\text{V}, T_C = 25^\circ\text{C}$		72		A	
$I_{S, pulse}$	Diode pulse Current	$V_{GS} = -4\text{V}$, pulse width t_p limited by T_{Jmax}		133		A	
t_{rr}	Reverse Recovery Time	$V_{GS} = -4\text{V}, I_{SD} = 40\text{A}, V_R = 800\text{V}$ $\text{dif/dt} = 3800\text{A/us}$		31		nS	
Q_{rr}	Reverse Recovery Charge			281		nC	
I_{rm}	Peak Reverse Recovery Current			18		A	

Switching Characteristics

Symbol	Parameter	Test conditions	Value			Unit	Note
			Min.	Typ.	Max.		
$t_{d(on)}$	Turn-On Delay Time	$V_{DS} = 800\text{V}, V_{GS} = -4/+18\text{V}$ $I_D = 40\text{A}, R_{G(int)} = 5\Omega$ $L = 276\text{nH}$		23		nS	Fig.22
t_r	Rise Time			9		nS	
$t_{d(off)}$	Turn-Off Delay Time			27		nS	
t_f	Fall Time			11		nS	
E_{on}	Turn-On Energy			352		uJ	Fig.19
E_{off}	Turn-Off Energy			170		uJ	
E_{tot}	Total switching energy			522		uJ	

Typical Performance

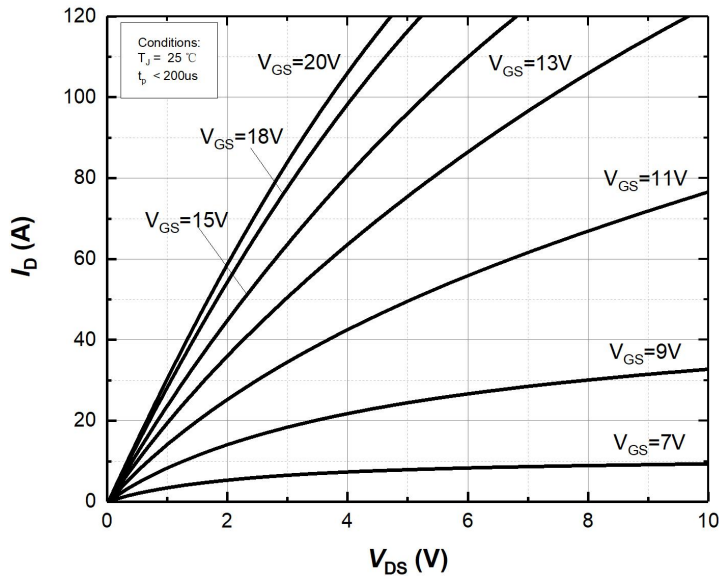


Figure 1. Output characteristics at $T_j=25^\circ\text{C}$

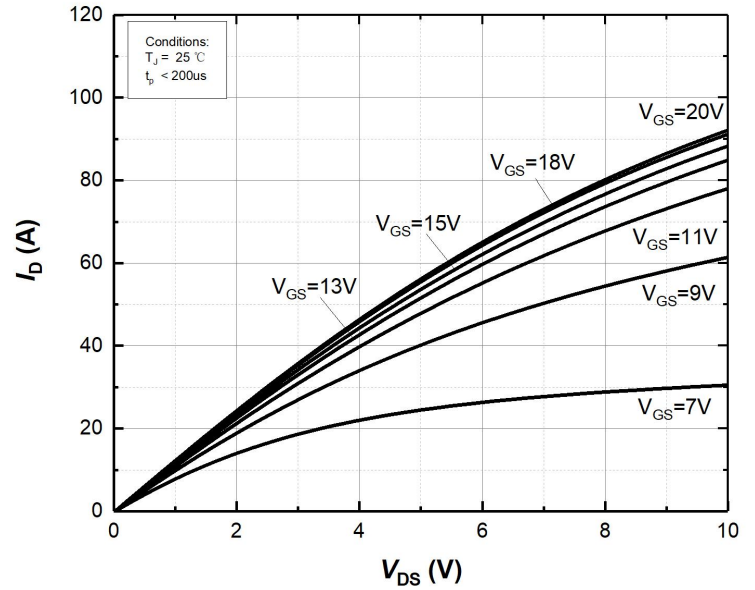


Figure 2. Output characteristics at $T_j=175^\circ\text{C}$

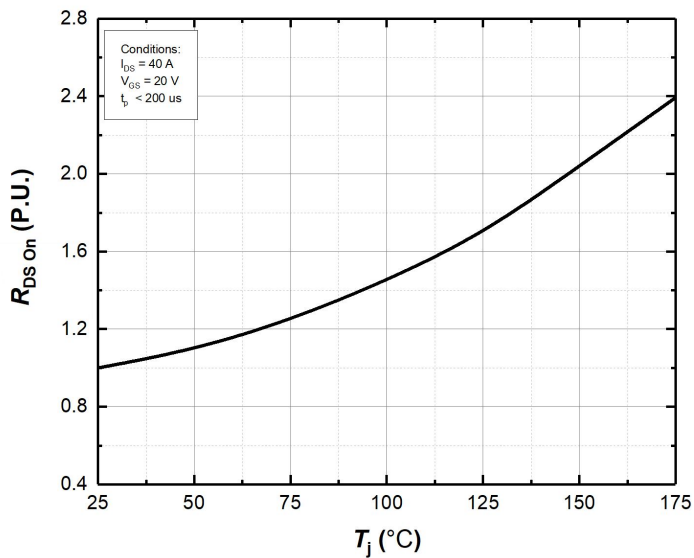


Figure 3. Normalized On-Resistance vs. Temperature

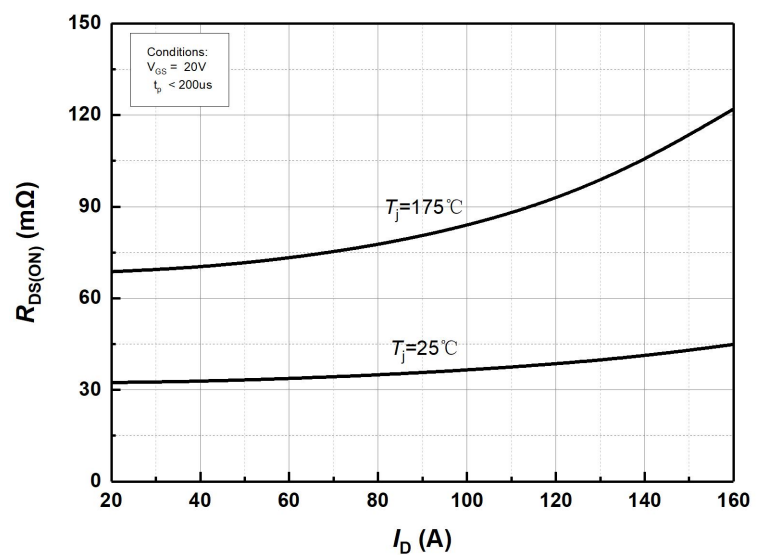


Figure 4. On-Resistance vs. Drain current for Various Temperature

Typical Performance

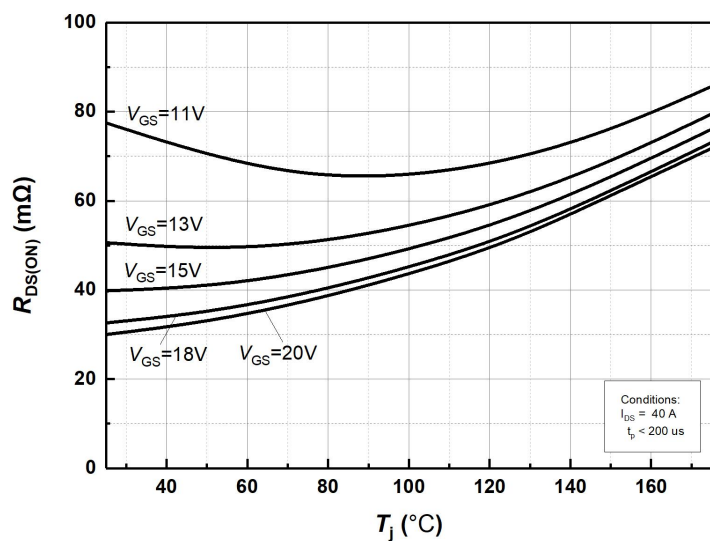


Figure 5. On-Resistance vs. Temperature for Various Gate Voltage

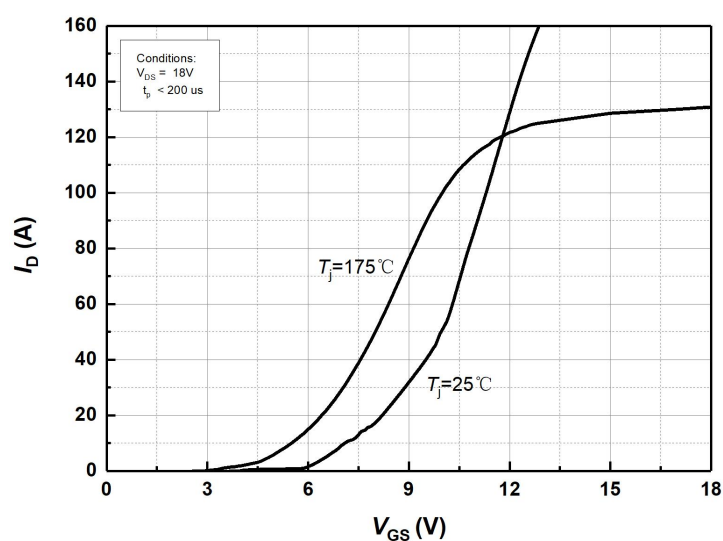


Figure 6. Transfer Characteristics for Various Junction Temperatures

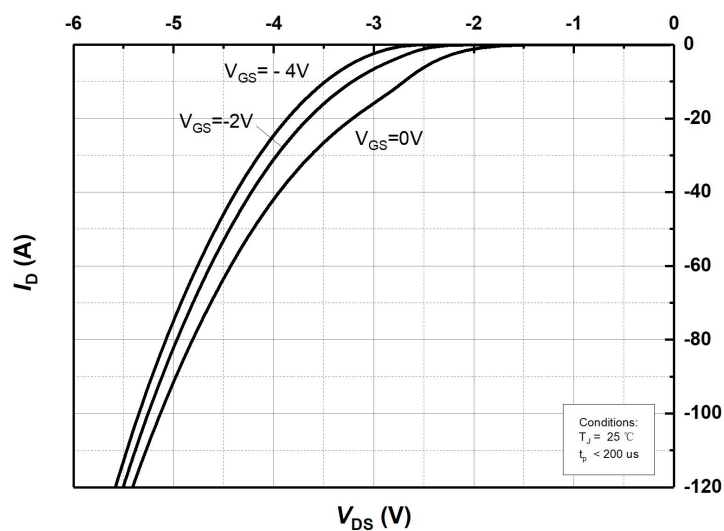


Figure 7. Body Diode Characteristics at $T_j=25^{\circ}\text{C}$

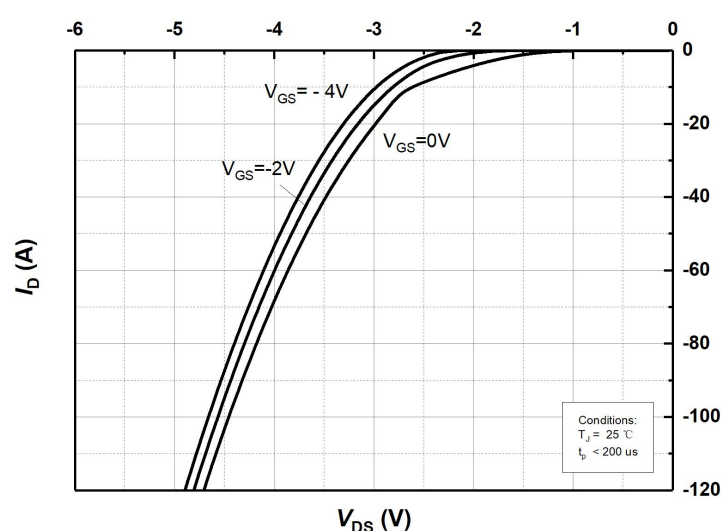


Figure 8. Body Diode Characteristics at $T_j=175^{\circ}\text{C}$

Typical Performance

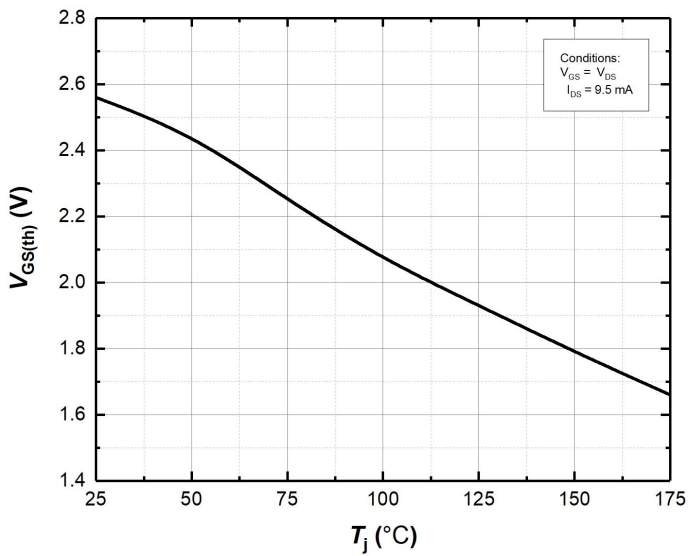


Figure 9. Threshold Voltage vs. Temperature

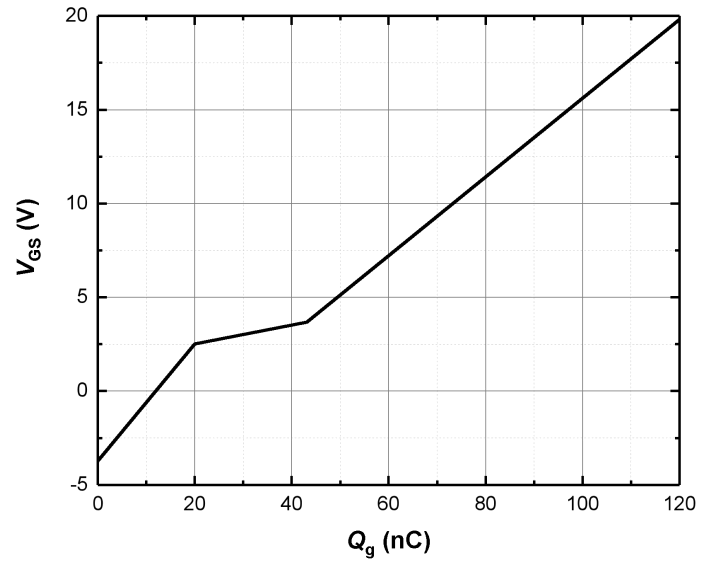


Figure 10 Gate Charge Characteristics

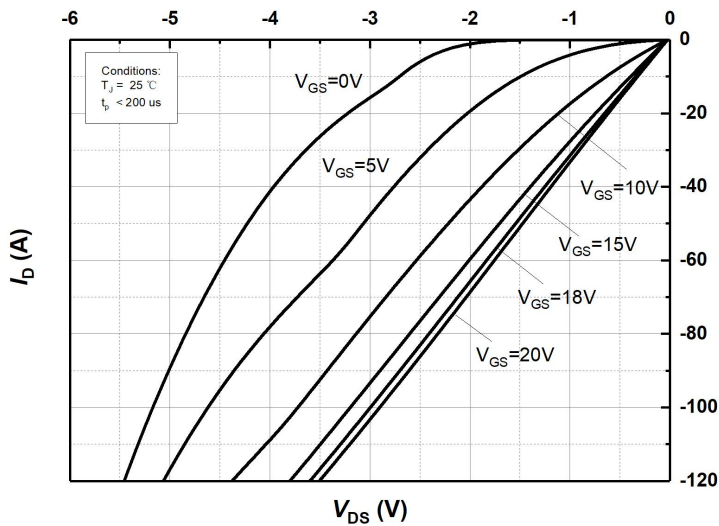


Figure 11. 3rd Quadrant Characteristic at $T_j=25^{\circ}\text{C}$

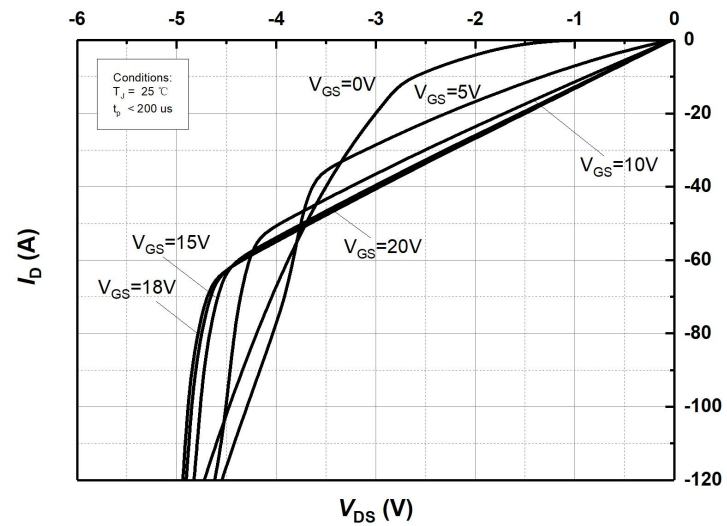


Figure 12. 3rd Quadrant Characteristic at $T_j=175^{\circ}\text{C}$

Typical Performance

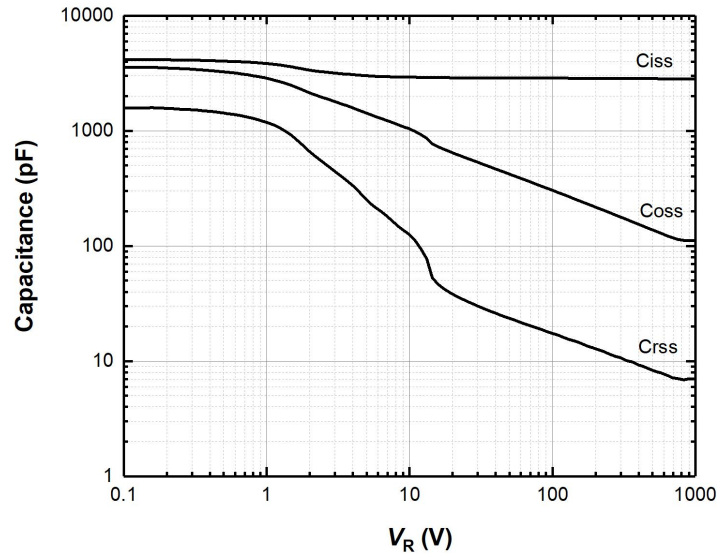


Figure 13. Capacitances vs. Drain-Source Voltage (0 – 1000V)

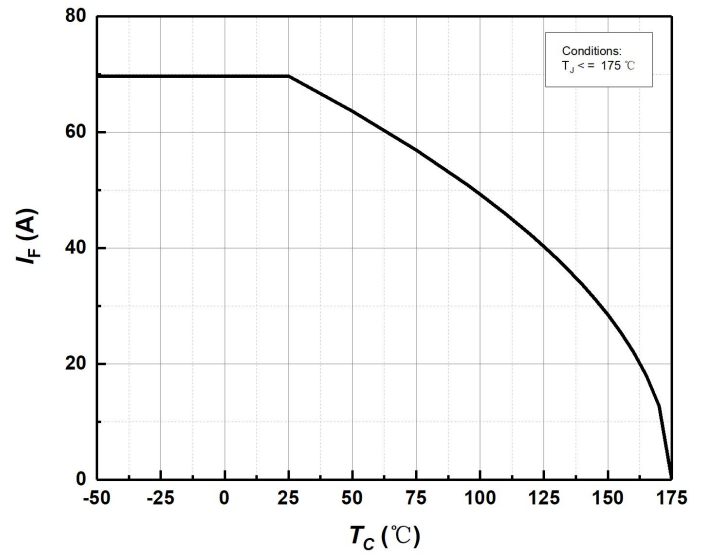


Figure 14. Continuous Drain Current Derating vs Case Temperature

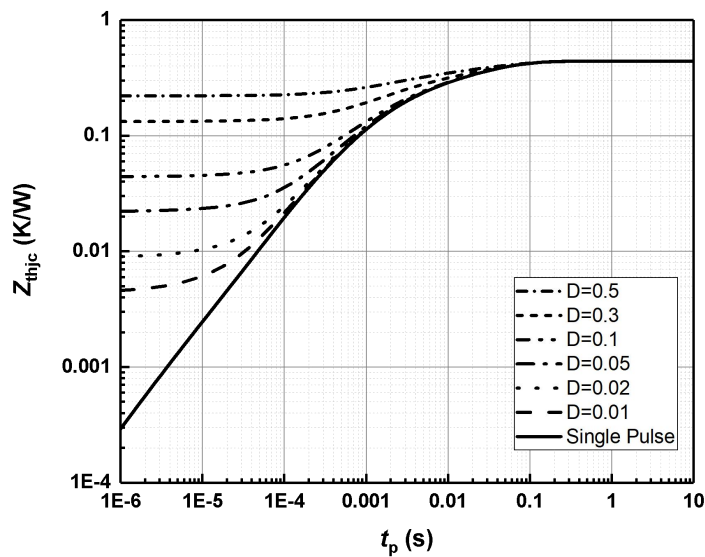


Figure 15. Transient Thermal Impedance (Junction – Case)

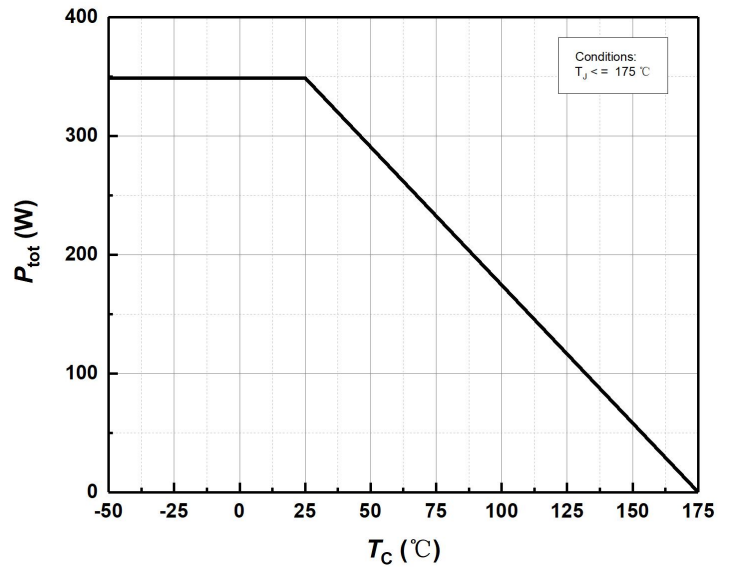


Figure 16. Maximum Power Dissipation Derating vs. Case Temperature

Typical Performance

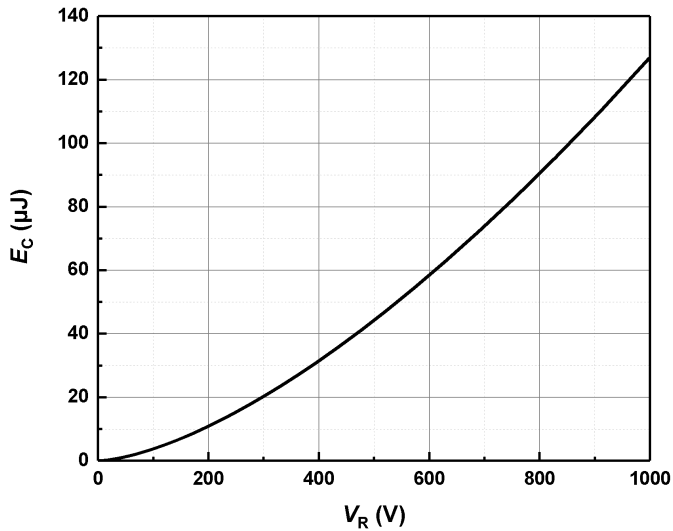


Figure 17. Output Capacitor Stored Energy

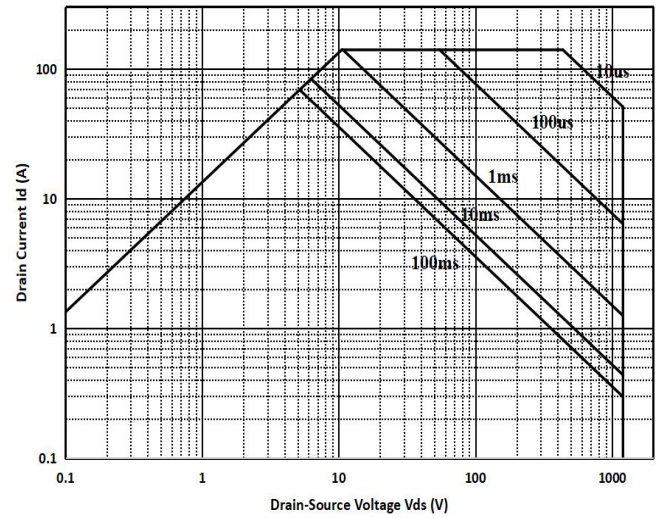


Figure 18. Safe Operating Area

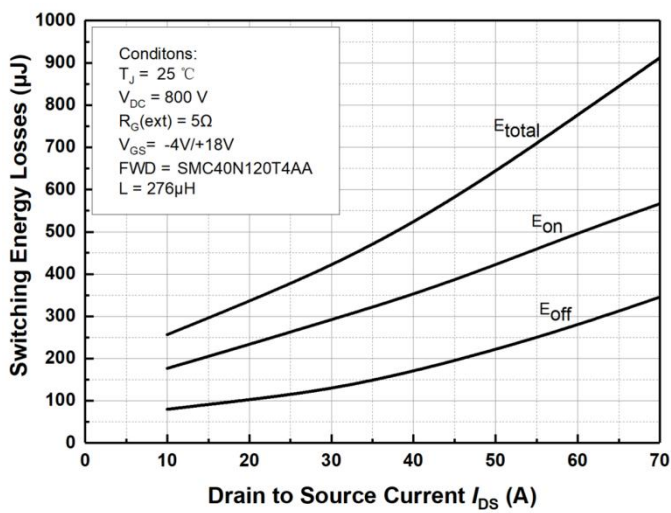


Figure 19. Clamped Inductive Switching Energy vs. Drain Current($V_{DD} = 800V$)

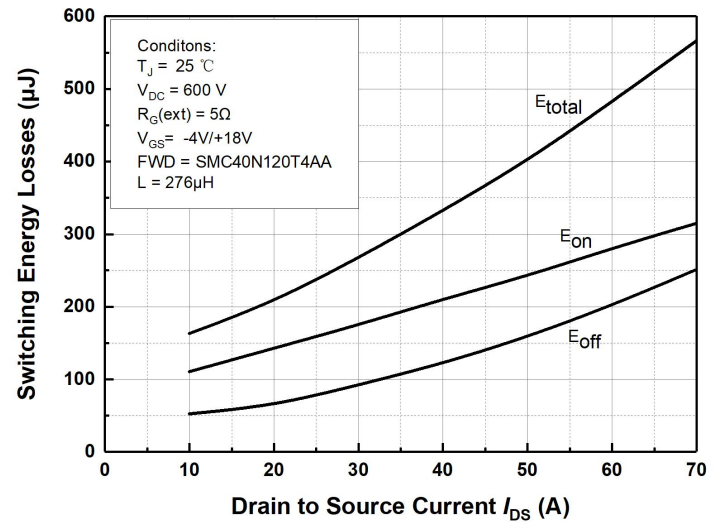


Figure 20. Clamped Inductive Switching Energy vs. Drain Current($V_{DD} = 600V$)

Typical Performance

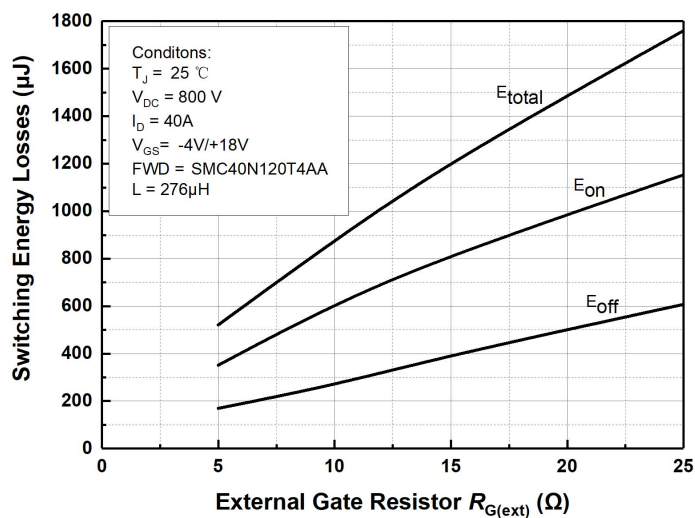


Figure 21. Clamped Inductive Switching Energy vs. $R_{G(ext)}$

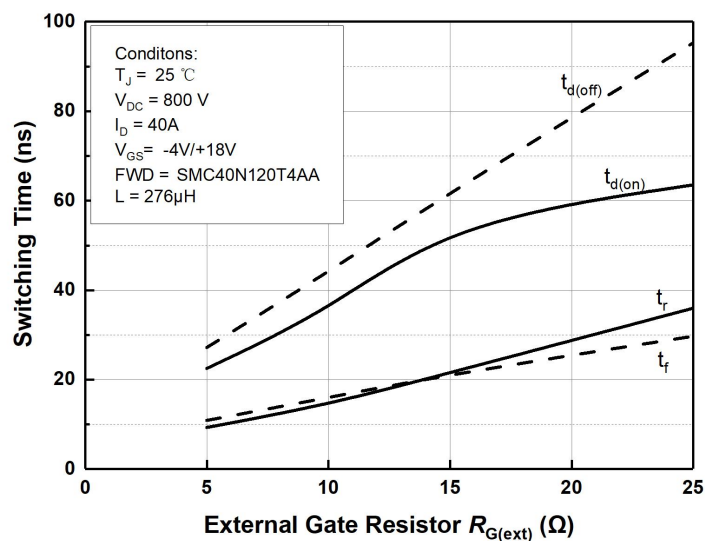
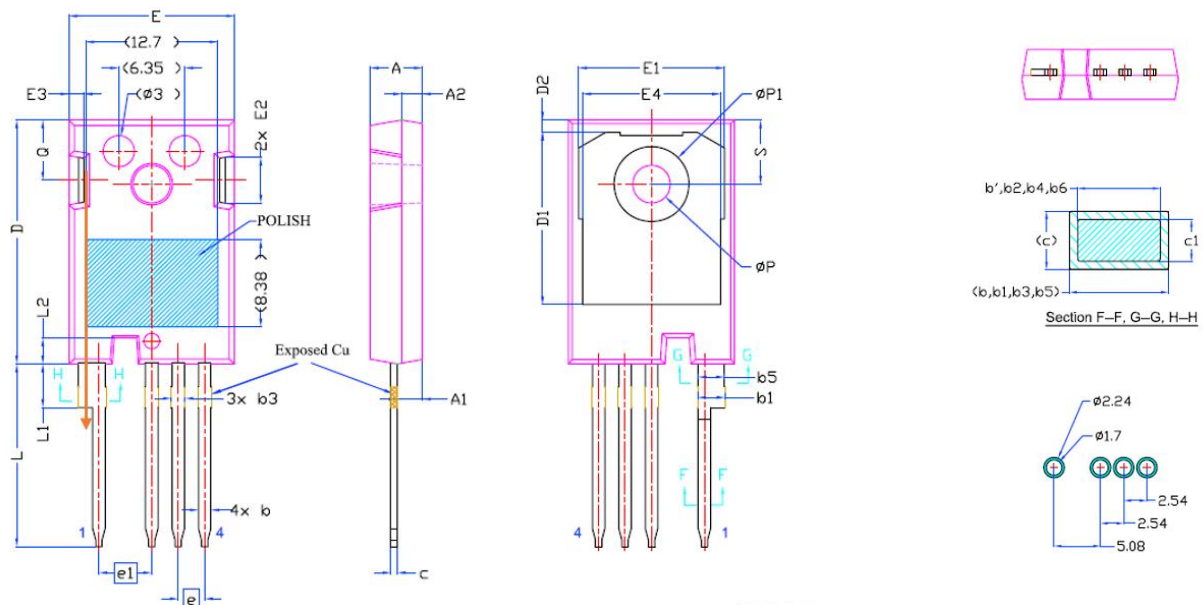


Figure 22. Switching Times vs. $R_{G(ext)}$

Package Dimensions


SYMBOL	MM		
	MIN	NOM	MAX
A	4.80	5.02	5.21
A1	2.29	2.41	2.54
A2	1.91	2.00	2.16
b'	1.07	1.20	1.28
b	1.07	1.20	1.33
b1	2.39	2.67	2.94
b2	2.39	2.67	2.84
b3	1.07	1.30	1.60
b4	1.07	1.30	1.50
b5	2.39	2.53	2.69
b6	2.39	2.53	2.64
c	0.55	0.60	0.68
c1	0.55	0.60	0.65
D	23.30	23.45	23.60
D1	16.25	16.55	17.65
D2	0.95	1.19	1.25
E	15.75	15.94	16.13
E1	13.10	14.02	14.15
E2	3.68	4.40	5.10
E3	1.00	1.45	1.90
E4	12.38	13.26	13.43
e	2.54BSC		
e1	5.08BSC		
L	17.31	17.57	17.82
L1	3.97	4.19	4.37
L2	2.35	2.50	2.65
ΦP	3.51	3.61	3.51
ΦP1	7.19REF.		
Q	5.49	5.79	6.00
S	6.04	6.17	6.30

Legal Disclaimer

The information given in this document shall be for illustrative purposes only and shall in no event be regarded as a guarantee of conditions or characteristics. Existar Technologies reserves the right to change any information herein. With respect to any examples, hints or any typical values stated herein and/or any information regarding the application of the product, Existar Technologies or its affiliates hereby make no representation or warranty of any kind, expressed or implied, as to any information provided hereunder, including without limitation as to the accuracy, completeness or non-infringement of intellectual property rights of any third party, and they assume no liability for the consequences of use of such information. In addition, any information given in this document is subject to customer's compliance with its obligations stated herein and any applicable legal requirements, norms and standards concerning customer's products and any use of the product of Existar Technologies in customer's applications. The information contained herein is exclusively intended for technically trained staff. No license is granted by implication under any patent right, copyright, mask work right, or other intellectual property right. It is customer's sole responsibility to evaluate the suitability of the product for the intended application and the completeness of the product information given herein with respect to such application. In no event shall Existar Technologies or its affiliates be liable to any party for any direct, indirect, special, punitive, incidental or consequential damages of any nature whatsoever, including but not limited to loss of profits and loss of goodwill, whether or not such damages are based on tort or negligence, warranty, breach of contract or any other legal theory.